

ZTA-BGU/WP Addressable Weatherproof Break Glass Unit




Complies with EN54 Part II

This weatherproof addressable Break Glass unit is manufactured from aluminium in order to withstand harsh environments. It has a built in push button activator to signal an alarm activation.

The address of the call point is set via an internal address module. Valid addresses are 1 to 126. The call point will return an analogue value of 16 for normal conditions, and a value of 64 during an alarm condition.

The unit is finished in red anti-corrosive epoxy powder coating, with 2 x 20mm cable entries. The unit is supplied with a hammer and chain to operate the unit.

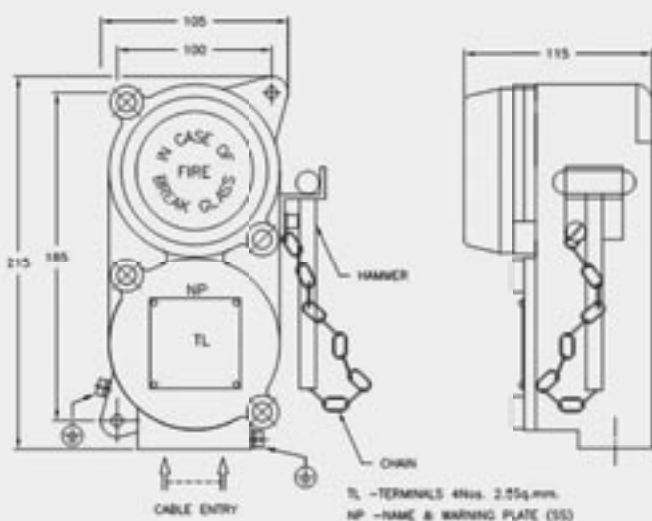

MODEL	ZTA-BGU/WP
PART NO	43-410
INPUT VOLTAGE	17-33V DC
ELEMENT TYPE	GLASS
QUIESCENT CURRENT	1.5 mA
ALARM CURRENT	3 mA
ALARM ACTIVATION	BREAK GLASS WITH HAMMER
OPERATING TEMPERATURE	-20°C to 50°C
MAX. HUMIDITY	95% RH N/C
IP RATING	IP 65
SIZE (WxHxD mm)	260 X 260 X 110 105 X 100 X 58
WEIGHT	1.5 kg