

## PMP-REP & PMP-REP/M Premier M Plus Repeater Panel




The Premier M Plus repeater is available in 2 versions.

The standard repeater offers display & control functions, but is limited to one per system.

The second version allows multiple repeaters on the system, but they do not have any control functions. IE they can not be used to silence or reset the system.

A single repeater can be powered from the panel's Auxiliary 24V supply. If more than one repeater is to be used, a separate 24V supply should be used.

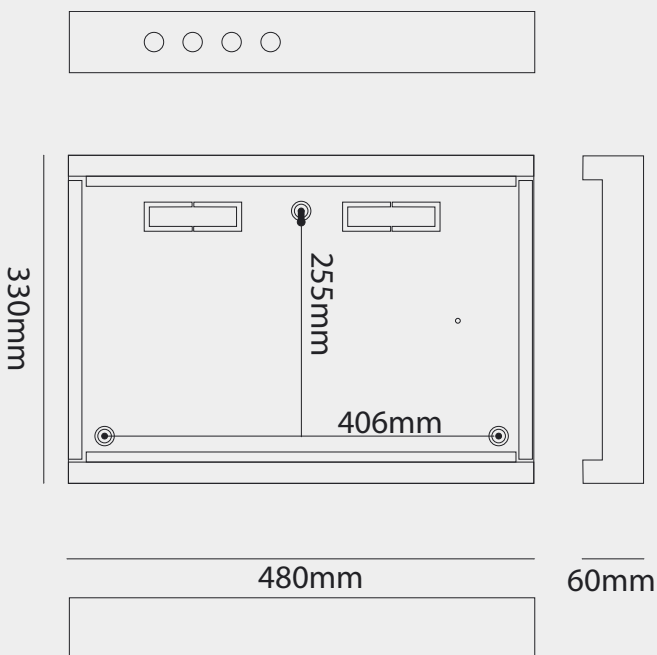

MODEL	PMP-REP	PMP-REP/M
PART NO	37-026	37-027
SUPPLY VOLTAGE	20 - 30V DC	
FUNCTIONS	DISPLAY & CONTROL	DISPLAY ONLY
QUANTITY PER SYSTEM	1	5
CONNECTIONS	SERIAL REPEATER A SERIAL REPEATER A +24V DC 0V	
OPERATING TEMPERATURE	0° C to 50° C	
ENCLOSURE SIZE	480 x 330 x 60 mm	
WEIGHT	4.8 kg	