

PRE 8M+ Premier M Plus Control Panel 8 Zone - 24 zone

Complies to EN54 pt. 2 & 4




The Premier M plus control panels are designed to fulfill the requirements of EN54 part 2 and part 4 as well as being easy to install, operate and maintain.

Being of modular construction, the basic Mplus panel has 8 zone capacity, expandable to 12,16,20 and 24 zones with M+4Z and M+8Z expansion cards.

Should zonal alarm be required, M+4ZA and M+8ZA cards can be added, and they will provide 50mA, 24 Vdc output per zone in alarm condition.

Mounting the panel

The Premier M Plus is suitable for Surface Fitting, or Semi-flush fitting, with just the door protruding.

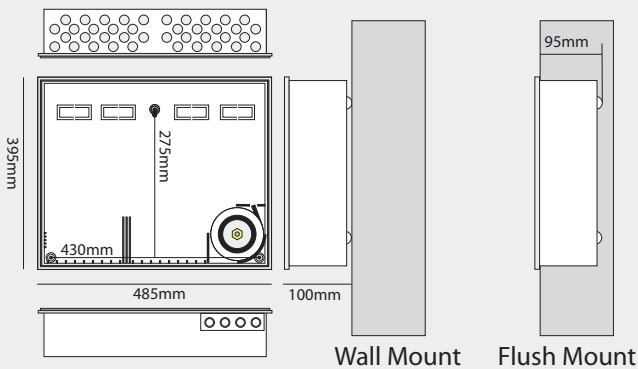

MODEL	PRE 8M+
PART NO	37-020
DETECTION ZONES	8
EXPANDABLE TO	12,16,20 & 24
MAINS VOLTAGE	230 VAC± 10% / -15% @ 50/60 Hz
SYSTEM VOLTAGE	24 Vdc (Nominal)
ZONE VOLTAGE	21 Vdc
SOUNDER ALARM O/P	4 x 250 mA @ 24 Vdc
FAULT RELAY O/P	1 x relay SELV @ 1 A Maximum
FIRE RELAY O/P	1 x relay SELV @ 1 A Maximum
ZONE CAPACITY	32 Devices
ZONE E.O.L	100µF Capacitor
CHARGER VOLTAGE	28.4 Vdc (batteries disconnected)
CHARGER SIZE	3.0 Amp
ENCLOSURE	480L x 395H x 100D mm
WEIGHT	14.00 Kg
IP RATING	IP 43